
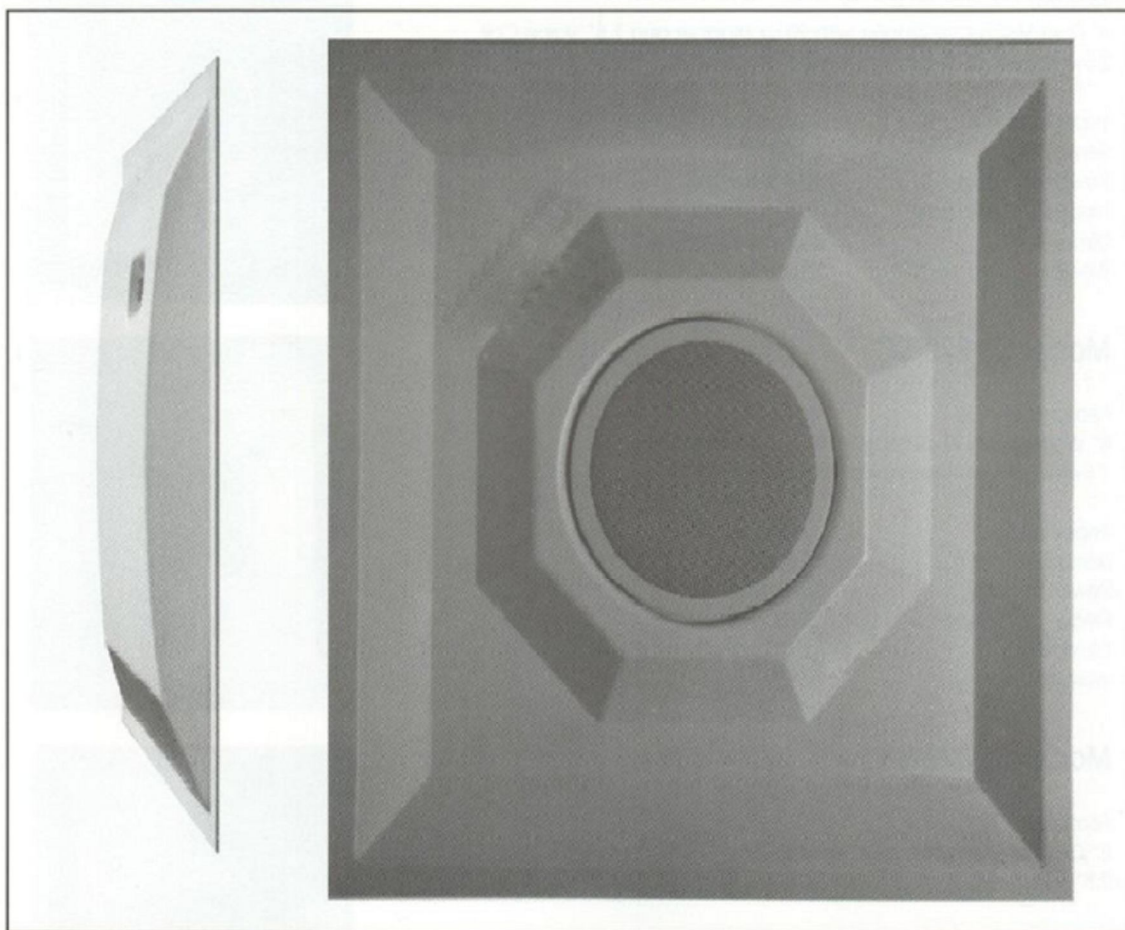


CS 822  
CEILING PANEL SPEAKERS

The new CS 822 ceiling panel speakers offer higher quality sound, easier installation, and a more attractive appearance than conventional ceiling mounted loudspeakers. These light weight PVC enclosures fit perfectly into a standard 2' x 2' ceiling grid and the low profile design allows installation in ceilings with as little as 4.5" of space above the grid. Installation couldn't be easier. Simply connect the wires and drop the panel in to place. No holes to cut, no bridge support to mount, no baffle to install, and no mess to clean up.

All models are available in either black or white.




The spring-loaded input terminals are fully recessed into the rear of the panel and can accept up to 12 gauge wire.

## Model CS 822-SX

### Features:

8" Coaxial Speaker with 10 oz Magnet  
2.5" Tweeter

Impedance	8 ohms or 70v
Sensitivity	91 db
Power handling	35W RMS
Frequency Response	50 Hz - 16 kHz
Dimensions	23.75" x 23.75" x 4.5"
Weight	6 Lbs.

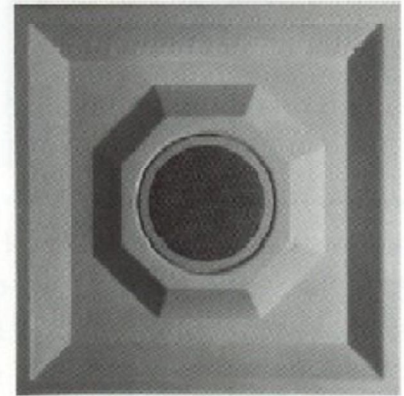


## Model CS 822-SF

### Features:

8" Full Range Speaker with 10 oz Magnet

Impedance	8 ohms
Sensitivity	88 db
Power handling	15W RMS
Frequency Response	60 Hz - 15 kHz
Dimensions	23.75" x 23.75" x 4.5"
Weight	5.8 Lbs.

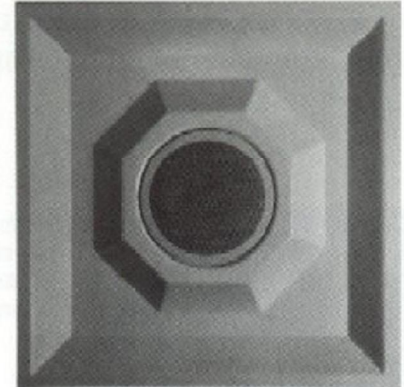

VIBRANT TECHNOLOGIES CORPORATION

12581 ULMERTON ROAD  
LARGO, FLORIDA 33774

1-800-449-0845

[www.vibranttech.com](http://www.vibranttech.com)